



JULY, 2022

CELLULAR PRODUCT CATALOG

TABLE OF CONTENTS / V1.0

Who We Are?	4	RUT360	46
Our Team	5	RUT950	48
Holistic Approach	6	RUT951	50
Portfolio	8	RUT955	52
Our Focus	9	RUT956	54
RMS		RUTX09	56
RMS - REMOTE MANAGEMENT SYSTEM	12	RUTX11	58
Use Case: Centralized remote vending machine POS system management	14	RUTX12	60
Use case: Remote calibration and control of smart traffic lights	15	RUTX14	62
		RUTXR1	64
MODEMS		TCR100	66
TRM240	18	Use Case: Safe and simple to set up home network with TCR100	68
TRM250	20	Use Case: Wireless broadband connectivity for gas station	69
		Cellular devices comparison	70
GATEWAYS		ACCESSORIES	
TRB140	24	Powering Options	72
TRB141	26	Antennas Options	74
TRB142	28	Mounting Options	75
TRB145	30		
TRB245	32		
TRB255	34		
Use Case: Manufacturing facility remote management	36		
Use Case: Wireless parking availability data transmission	37		
		Our Worldwide Offices	76
ROUTERS			
RUT200	40		
RUT240	42		
RUT241	44		

WHO WE ARE?

**24 YEARS
OF IoT BUSINESS**

We are a rapidly growing technology company, manufacturing professional network connectivity equipment for international markets. Through long-term experience and research and development of industrial network devices for IoT and M2M communication, we have developed a wide portfolio of products for the most complex areas, such as Industry 4.0, Smart City, and Green Energy.



OUR MISSION IS

to be a fast and flexible partner and be closer to our clients in every world region. Longstanding experience, reliable supply chain, and highest technology process models enable us to produce millions of IoT devices to our clients.

OUR VISION IS

to become one of the global leaders providing unique IoT solutions that contribute to making people's lives easier. We are open-minded to establish the environment for the creative and ambitious work professionals in Lithuania and the rest of the world to grow and contribute towards our Mission.

OUR VALUES ARE

not only working but also living to help and sharing kindness to people, especially those who need our help the most. We are keeping our values by continuously and courageously creating synergy between Teltonika IoT Group and business partners as well as clients.

**30
OFFICES
IN 19
COUNTRIES**

OUR TEAM

BIGGEST STRENGTH!

Teltonika Networks has a proven track record of rapid growth within professional and industrial cellular connectivity market segments. It would not be possible without a strong, ambitious, and continuously growing team.

640+

employees world wide

58%

overall team growth in 2021

67%

RND team growth in 2021

21+

nationalities

**B2B TELTONIKA
ACADEMY**

**IoT TELTONIKA
ACADEMY**

**MORE THAN 330
COMPLETED INTERNSHIPS**

GROWING TALENT

We have established IoT and B2B academies that closely collaborate with local universities by hosting guest lectures and supporting them with custom scholarships. However, the biggest gain of these academies is the student internships. During them, we share all of our know-how and experience. This practice is also beneficial to us as it helps to attract the best talent to join our young but already experienced team.

HOLISTIC APPROACH



From concept to the finished product - we develop everything in-house to ensure maximum quality and efficiency. It enables us to move much faster because we do not rely on any externalities.

Over the years, we have implemented hundreds of customized projects, from the smallest firmware changes to full-scale hardware alterations. This experience helped our partners capture more opportunities in the fast-paced technology environment - together.

We make all of our products in the state-of-the-art Teltonika IoT Group manufacturing facility in Vilnius, Lithuania. Full control over our production allows us to ensure that we deliver only the best and most reliable devices.



**6 MODERN
SMT LINES**

**100+ ROBOTS FOR
AUTOMATION**

**ECOFRIENDLY PACKAGING
AND LASER ENGRAVING**

FROM CONCEPT TO THE FINISHED PRODUCT

EXPERIENCE

For more than 24 years we have been providing reliable Industrial IoT & M2M connectivity solutions that are secure and easy to use.

FLEXIBILITY

We have implemented hundreds of customized projects from the smallest firmware changes to full-scale hardware alterations.

ALL IN ONE

From concept to the finished product - we develop everything in-house to ensure maximum quality and efficiency.



PORTFOLIO

WE HELP YOU
CONNECT

We designed our product portfolio to help our partners access opportunities within the rapidly growing IoT and Industrial IoT space. It consists of modems, gateways, routers, switches, and IoT platforms. We have grown to be one of the leaders of cellular IoT devices for industrial and professional applications. From automation, smart grid, to public transport connectivity – hundreds of thousands of our networking products are currently at the heart of our partners' solutions.

GROWING PORTFOLIO	+2	+3	+5	+5	+5	+8
	2017	2018	2019	2020	2021	2022 Q1-Q2

31 DEVICES - UNLIMITED USE CASES



INDUSTRIAL & AUTOMATION

Global adoption of automation demands the ability to monitor and manage equipment remotely to increase productivity.



ENERGY & UTILITIES

Reducing power consumption and maintenance costs by building wired and wireless IoT connectivity solutions.



SMART CITY

Connected sensors, infrastructure, vehicles, and devices require secure and reliable IoT connectivity products.



TRANSPORTATION

Networking devices transport operators to optimize their businesses and create new revenue streams.



ENTERPRISE

Enterprise applications require primary and backup connectivity solutions that are secure, reliable, and easy to use.



RETAIL

IoT connectivity solutions offer new ways to interact with clients and collect valuable data to make strategic decisions.

OUR FOCUS

INSPIRE

At Teltonika Networks, we have a clearly defined product development philosophy which we use at every stage of product development decision-making. We know that security and reliability are the two core factors in industrial networking device selection. However, we thrive on offering complex and capable devices without sacrificing ease of use. We wish to make IoT accessible to every enthusiast and inspire creativity in solving real-life problems with technology.

RELIABLE

We have long-standing experience manufacturing industrial devices that can withstand the most rigorous environments and offer connection continuity with multiple backup scenarios.

SECURE

We assure the highest level of security for all Teltonika Networks products by performing regular safety tests and releasing periodical firmware updates to eliminate any risks of breaches.

EASY TO USE

Industrial Teltonika Networks devices are designed mainly for professional applications, yet they are still easy to use. Offering products that do not require any special training is one of our strengths.

RUTOS

OPERATING SYSTEM FOR NETWORKING PRODUCTS

RutOS is our unified router operating system and the core component of all Teltonika Networks products. 10+ years of development made RutOS grow to the highest industry standards. Security, stability, and user experience are the key values that our platform is built around. Intuitive Web interface and constantly growing Wiki/Crowd-Support platforms help our partners cut costs on engineer training while implementing new devices or migrating from other systems.

Teltonika Networks products stand out as easily manageable devices on the market. Multiple remote monitoring and control functions are an inseparable part of RutOS. This Open-source OpenWrt-based operating system and complete software documentation enable easy development of custom software solutions or new functionality and fast integration with third-party platforms.

COMPLETE SOLUTION

RMS

REMOTE MANAGEMENT SYSTEM

RMS is a cloud-based IoT platform designed for intuitive and convenient remote monitoring, configuration, and control of compatible Teltonika Networks products and third-party devices. We offer four different services that allow for extensive management and advanced analytics. Choose a service that meets the needs of your current solution infrastructure and incorporate it into a familiar system environment using RMS API.



RMS

REMOTE MANAGEMENT SYSTEM

The Remote Management System (RMS) by Teltonika Networks allows you to control your whole connected IoT solution from anywhere in the world. RMS offers remote access to all devices from a single user-friendly platform. We tailored RMS to meet the requirements of various clients with four available RMS services.

NO PUBLIC IP

Access your devices anywhere, without public IP

SECURE

Protect your data with encrypted communication

CUSTOMIZABLE

Adapt the interface and functionality to your needs

EFFICIENT

Optimize time and resources with remote access

TRY RMS FOR FREE

Explore the potential of any available RMS service with a [30-day trial!](#)



MANAGEMENT

RMS MANAGEMENT enables complete control over your fleet of Teltonika Networks routers and gateways, assuring their security and availability. Enjoy the flexibility of remote configurations, monitoring, and updates of your connectivity device ecosystem even without a public IP!

- // MULTI-CONFIGURATION & FOTA
- // HISTORICAL DATA AND REPORTS
- // USER-FRIENDLY INTERFACE
- // TASK MANAGER FOR CUSTOM FUNCTIONS
- // 24/7 MONITORING AND ALARMS
- // LIMITED TIME THIRD-PARTY ACCESS

CONNECT

RMS CONNECT is a unified access system that allows remotely reaching and controlling smart devices. If your PLC, Industrial PC, CCTV camera, POS system, or other intelligent device is reachable by one of the RMS-compatible routers or gateways, you can access it with RMS CONNECT.



Reach any device's WEB interface using HTTP(S)



No GUI, no problem! Access any device terminal via SSH or Telnet



Access remote PC, HMI, or any desktop with RDP and VNC protocols

API

What could be more efficient than having a single software system for your whole connected solution infrastructure? RMS API allows your IoT Platform to directly interact with RMS and get all the needed functionality and data.

FAMILIAR INTERFACE

OPENAPI STANDARD

TESTING SANDBOX

DEVELOPER PORTAL

VPN

Managing large-scale networks containing various devices can be tricky! RMS VPN offers the easiest way of setting up VPN connections to your whole infrastructure. Now you may remotely, simply, and securely reach multiple endpoints without configuring different protocols or setting up servers. We will take care of all this for you in the background!

// We use a top-trusted world-renowned OpenVPN protocol to establish secure connections with your devices.

// Use our on-demand service for an unlimited number of VPN clients. Pay only for the amount of data you use!

CENTRALIZED REMOTE VENDING MACHINE POS SYSTEM MANAGEMENT



RETAIL

Vending machines have been around for centuries. Their popularity is still on the rise for several reasons. First, they do not require any human presence and save time in fast-paced environments. Also, they offer 24/7 availability and do not need much space, hence lower upkeep costs.

SOLUTION

Usually, vending machines use third-party cashless payment terminals. An essential element for these systems is having uninterrupted, secure internet connectivity. In this case, the RUT300 Ethernet router connects the POS, Linux PC, and various sensors to the network using five Gigabit Ethernet ports. TSW110 gateway enables connecting more sensors for a plug-n-play ecosystem expansion.


Another vital element in such solutions is remote management capability. Vending machine operators look after hundreds of machines in varied distanced locations. Due to stringent security policies, they require frequent firmware updates. Here RMS comes in to save the day of engineers and support specialists. Not only may they connect to Teltonika Networks routers for diagnostics, updates, and troubleshooting via RMS Management, but they can also reach

third-party devices, including the POS terminal, via RMS Connect to carry out whatever tasks they require.

To better illustrate the gain of RMS, let's multiply the number of vending machines by the hourly rate of an engineer and the fuel consumption needed to visit multiple remote locations. With RMS Connect, users can update thousands of POS terminals simultaneously from anywhere they are.

BENEFITS

- /Remote management of Teltonika Networks devices via RMS Management for diagnostics, maintenance, and troubleshooting.
- /Remote accessibility of third-party devices via RMS Connect.
- /Real-time alerts to stay on top of your solution and prevent costly downtime.
- /Periodical or on-demand activity reports for optimization.
- /Compatible with various OS, including Linux, Windows, and Mac.
- /Hosted on AWS, RMS complies with rigorous security requirements and aligns with the latest cyber threat data.
- /Friendly payment plans: pay only for the services you need and the amount of data you use.

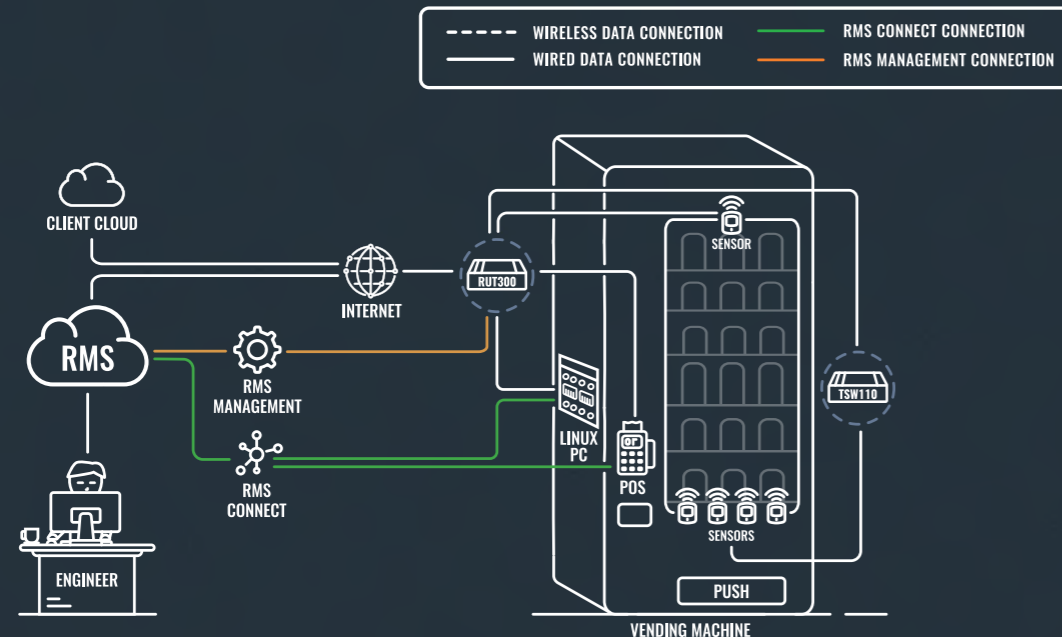

REMOTE CALIBRATION AND CONTROL OF SMART TRAFFIC LIGHTS



SMART CITY

One of the essential elements to combat heavy traffic is city planning. Our client received a project to install the first Microprocessor Optimized Vehicle Actuation and place it in one of the busiest roundabouts. Yet, the system had to be calibrated by a manufacturer expert. Thus, due to Covid-19 travel restrictions, meeting project delivery dates was a massive challenge.

SOLUTION

Our client decided to redesign their solution by adding Teltonika Networks connectivity products to meet the deadlines. They chose to establish remote communication by using the RUT240 industrial cellular router so that the engineer could calibrate the system while staying abroad.

First, the RUT240 router provides an internet connection to this IoT solution. A traffic signal controller connects with the router via an Ethernet cable. Then the PLC can accommodate all of the traffic signals and sensor connections. The PLC can regulate traffic green light time with the data from induction loops installed on the tarmac.


Another part of this solution is the Teltonika Networks RMS. Teltonika RMS Management allows the RUT240 to monitor its temperature,

install firmware updates, or set up alerts. RMS Management can accommodate more compatible Teltonika Networks devices in the future without the need for public IPs.

On the other hand, the RMS Connect can access any other third-party equipment. With its help, you can then remotely manage any settings of the connected devices as if you were there physically. That is also how the engineer was able to calibrate the PLC remotely.

BENEFITS

- /The RUT240 offers easy integration due to its 4G connectivity and small size.
- /RUT240 delivers high performance in rigorous environments, a perfect choice for solutions in extreme conditions, for example, near high traffic where you need resistance to vibrations. During the summer, the router's temperature had reached 78°C, and it still worked fine.
- /Teltonika RMS Connect allows access to any connected smart devices to configure them and extract data.
- /RMS Management allows access and control for all compatible Teltonika Networks devices without the need for a public IP.

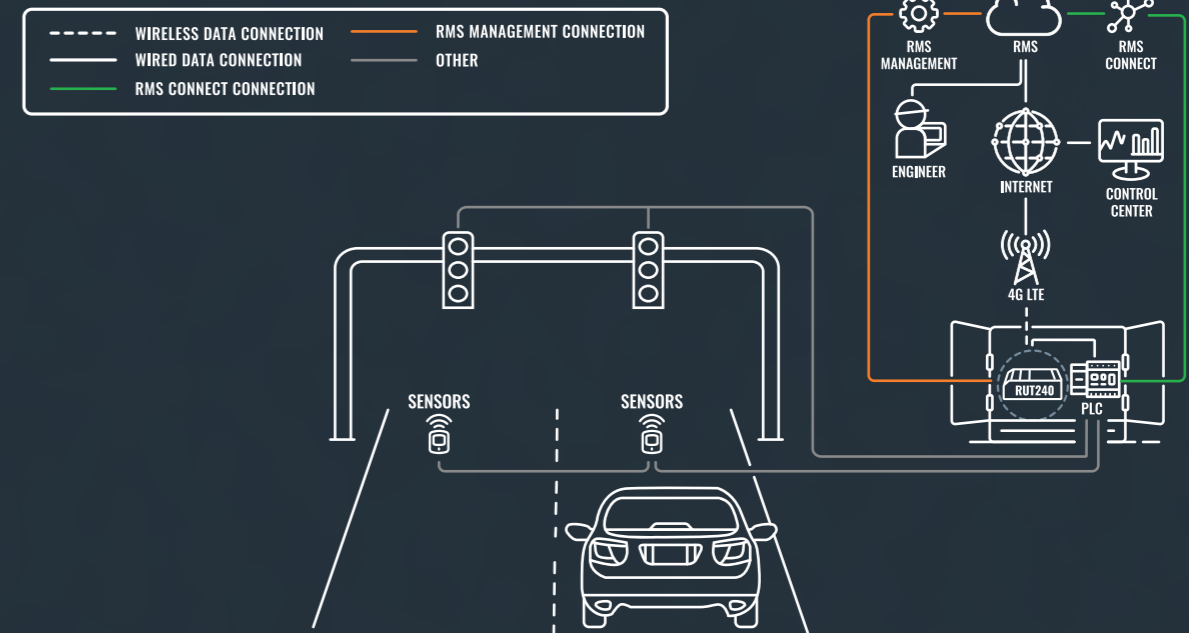

MODEMS

Industrial cellular modems are the most cost-efficient and scalable method for providing reliable connectivity in industrial networking applications. A large amount of legacy and industrial IoT infrastructure worldwide requires different connectivity methods.

Robust industrial cellular modems from Teltonika Networks provide numerous cellular connectivity options, ranging from 2G (EGPRS) to 4G LTE Cat 1, LTE Cat-M1, and NB-IoT.

TRM240

INDUSTRIAL CELLULAR MODEM

TRM240 is an industrial-grade USB LTE Cat 1 modem with a rugged housing and an external antenna for better signal coverage. This product is perfect for upgrading existing industrial equipment with cost-efficient LTE connectivity.

CONNECTIVITY

4G LTE (Cat 1), 3G, 2G

COMPACT & DURABLE

Small size, easy installation

USB

Interface for Internet access

EXTERNAL ANTENNA

For deployment flexibility

STANDARD PACKAGE CONTAINS:

TRM240 // 1 x LTE antenna (swivel, SMA male) // Micro-USB cable (0.8 m) // 1 x hex key // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat 1), 3G, 2G
Powering option	microUSB, 5 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
USB	1 x Micro USB slave
Status LEDs	1 x LTE, 1 x Network, 1 x Power
Ingress protection rating	IP30
Operating humidity	10 % to 90 % non-condensing
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.5 mm
Weight	131 g

SOFTWARE

Network manager	Windows 7/8/8.1/10 Linux distributions
USB serial driver	Windows 7/8/8.1/10 Windows CE 5.0/6.0 Linux 2.6~5.4 Android 4.x/5.x/6.x/7.x/8.x/9.x
RIL driver	Android 4.x/5.x/6.x/7.x/8.x/9.x
NDIS driver	Windows 7/8/8.1/10
Gobinet driver	Linux 2.6~5.4
QMI_WWAN driver	Linux 3.4~5.4
Control via AT commands	3GPP TS27.007 and enhanced AT commands

TRM250

INDUSTRIAL CELLULAR MODEM

TRM250 is an industrial-grade USB LTE Cat-M1/NB-IoT/EGPRS modem with a rugged housing and an external antenna for better signal coverage. This product is perfect for providing cost-efficient internet connectivity in remote monitoring applications.

CONNECTIVITY

4G LTE (Cat M1), NB-IoT, 2G

COMPACT & DURABLE

Small size, easy installation

USB

Interface for Internet access

EXTERNAL ANTENNA

For deployment flexibility

STANDARD PACKAGE CONTAINS:

TRM250 // 1 x LTE antenna (swivel, SMA male) // Micro-USB cable (0.8 m) // 1 x hex key // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat M1), NB-IoT, 2G
Powering option	microUSB, 5 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
USB	1 x Micro USB slave
Status LEDs	1 x Network, 1 x Power
Ingress protection rating	IP30
Operating humidity	10 % to 90 % non-condensing
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.5 mm
Weight	130 g

SOFTWARE

Network manager	Windows 7/8/8.1/10 Linux distributions
USB serial driver	Windows 7/8/8.1/10 Windows CE 5.0/6.0 Linux 2.6~5.4 Android 4.x/5.x/6.x/7.x/8.x/9.x
RIL driver	Android 4.x/5.x/6.x/7.x/8.x/9.x
NDIS driver	Windows 7/8/8.1/10
Gobinet driver	Linux 2.6~5.4
QMI_WWAN driver	Linux 3.4~5.4
Control via AT commands	3GPP TS27.007 and enhanced AT commands

GATEWAYS

Teltonika Networks TRB series is a set of programmable M2M gateways designed to connect one device to the internet. Linux-based, highly functional TRB devices have industrial networking capabilities and various interfaces, such as Ethernet, RS232, RS485, or I/Os. All our gateways are 4G LTE capable and can connect to the RMS (Remote Management System) for intuitive remote monitoring, configuration, and control.



TRB140

INDUSTRIAL RUGGED LTE GATEWAY

TRB140 is an ultra-small, lightweight, and energy-efficient IoT device with mission-critical LTE Cat 4 and Gigabit Ethernet connectivity options. Linux environment offers a high degree of customization. This gateway is perfect for projects and applications where a single device must be upgraded with reliable and secure internet connectivity.

CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

COMPACTNESS

Small and rugged aluminum housing for easy installation

PROTOCOLS

Compatible with industrial DNP3 & Modbus communication protocols

RMS

For remote management, access & VPN services

STANDARD PACKAGE CONTAINS:

TRB140 // 9 W PSU // 1 x LTE antenna (magnetic mount, SMA male, 3 m cable) // Micro-USB cable (0.8 m) // 1 x hex key // LAN cable // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE

Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Qualcomm, ARM Cortex A7, 1.2 GHz
Storage	512 MBytes Flash (200 MBytes for userspace)
Memory	128 MBytes RAM (50 MBytes for userspace)
Powering option	4pin power socket, 9-30 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
Ethernet	1 x 10/100/1000 Ethernet port
Inputs/Outputs	On 4pin socket: 2 x Digital input/Digital open collector output (configurable)
Other	1 x Micro USB slave
Status LEDs	3 x Connection type, 5 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.4 mm
Weight	134 g

SOFTWARE

Operating system	RutOS
Mobile features	Auto APN, Band lock, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Firewall	Port forward, Traffic rules, Custom rules, Pre-configured firewall rules, NAT, NAT-T, NAT helpers, Unlimited firewall configuration via CLI
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, SSTP, Stunnel, DMVPN L2TP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	WEB UI, CLI, SSH, SMS, TR-069, SNMP, JSON-RPC, MQTT, RMS

TRB141

INDUSTRIAL RUGGED GPIO LTE GATEWAY

TRB141 is a small industrial LTE Cat 1 gateway equipped with diverse inputs/outputs and a Micro USB port. This gateway comes with secure, highly customizable RutOS and works perfectly for remote management of devices and applications using I/O.

CONNECTIVITY

4G LTE (Cat 1), 3G, 2G

COMPACTNESS

Small and rugged aluminum housing for easy installation

I/O

Wide range of Inputs/Outputs for remote monitoring and control

PROTOCOLS

Compatible with industrial DNP3 & Modbus communication protocols

STANDARD PACKAGE CONTAINS:

TRB141 // 9 W PSU // 1 x LTE antenna (magnetic mount, SMA male, 3 m cable) // Micro-USB cable (0.8 m) // 1 x hex key // I/O connector // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat 1), 3G, 2G
CPU	Qualcomm, ARM Cortex A7, 1.2 GHz
Storage	512 MBytes Flash (200 MBytes for userspace)
Memory	128 MBytes RAM (50 MBytes for userspace)
Powering option	4pin power socket, 9-30 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
Inputs/Outputs	On 4pin socket: 2 x Digital input/Digital open collector output (configurable) On 16pin socket: 1 x Isolated input, 1 x Single wire input, 1 x Analog input (with 4-20mA capability), 1 x Latching relay output, 1 x Non-latching relay output, 2 x Dry/Wet input (configurable)
Other	1 x Micro USB slave
Status LEDs	3 x Connection type, 5 x Signal strength, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.4 mm
Weight	136 g

SOFTWARE

Operating system	RutOS
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, SSTP, Stunnel, DMVPN L2TP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Services	DDNS, WEB filter, Traffic Logging

TRB142

INDUSTRIAL RUGGED LTE RS232 GATEWAY

TRB142 is an ultra-small, lightweight, and energy-efficient IoT gateway equipped with mission-critical LTE connectivity. TRB142 comes with a widely used RS232 interface for remote management of industrial devices.

CONNECTIVITY

4G LTE (Cat 1), 3G, 2G

COMPACTNESS

Small and rugged aluminum housing for easy installation

RS232

Equipped with RS232 for industrial serial communication

PROTOCOLS

Compatible with industrial DNP3 & Modbus communication protocols

STANDARD PACKAGE CONTAINS:

TRB142 // 9 W PSU // 1 x LTE antenna (magnetic mount, SMA male, 3 m cable) // Micro-USB cable (0.8 m) // 1 x hex key // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat 1), 3G, 2G
CPU	Qualcomm, ARM Cortex A7, 1.2 GHz
Storage	512 MBytes Flash (200 MBytes for userspace)
Memory	128 MBytes RAM (50 MBytes for userspace)
Powering option	4pin power socket, 9-30 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
Inputs/Outputs	On 4pin socket: 2 x Digital input/Digital open collector output (configurable)
Serial	1 x RS232
Other	1 x Micro USB slave
Status LEDs	3 x Connection type, 5 x Signal strength, 1 x Power
Operating temperature	-40° C to 75° C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.4 mm
Weight	135 g

SOFTWARE

Operating system	RutOS
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Modbus	TCP slave, TCP master, RTU master, RTU gateway, Modbus over MQTT
Serial	Console, Over IP, Modem, NTRIP, Modbus

TRB145

INDUSTRIAL RUGGED LTE RS485 GATEWAY

TRB145 is an ultra-small, lightweight, and energy-efficient IoT gateway equipped with mission-critical LTE connectivity that comes with a widely used RS485 interface for remote management of industrial equipment.

CONNECTIVITY

4G LTE (Cat 1), 3G, 2G

COMPACTNESS

Small and rugged aluminum housing for easy installation

RS485

Equipped with RS485 for industrial serial communication

PROTOCOLS

Compatible with industrial DNP3 & Modbus communication protocols

STANDARD PACKAGE CONTAINS:

TRB145 // 9 W PSU // 1 x LTE antenna (magnetic mount, SMA male, 3 m cable) // Micro-USB cable (0.8 m) // 1 x hex key // RS485 connector // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat 1), 3G, 2G
CPU	Qualcomm, ARM Cortex A7, 1.2 GHz
Storage	512 MBytes Flash (200 MBytes for userspace)
Memory	128 MBytes RAM (50 MBytes for userspace)
Powering option	4pin power socket, 9-30 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
Inputs/Outputs	On 4pin socket: 2 x Digital input/Digital open collector output (configurable)
Serial	1 x RS485
Other	1 x Micro USB slave
Status LEDs	3 x Connection type, 5 x Signal strength, 1 x Power
Operating temperature	-40° C to 75° C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.4 mm
Weight	130 g

SOFTWARE

Operating system	RutOS
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Modbus	TCP slave, TCP master, RTU master, RTU gateway, Modbus over MQTT
Serial	Console, Over IP, Modem, NTRIP, Modbus

TRB245

INDUSTRIAL M2M LTE GATEWAY

TRB245 is an industrial all-in-one M2M LTE Cat 4 gateway equipped with multiple inputs/outputs, RS232, RS485, and Ethernet interfaces, allowing for universal application in M2M solutions.

CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

DUAL SIM

With auto failover, backup WAN and other switching scenarios

SERIAL PORTS

Equipped with RS232/RS485 serial communication interfaces

I/O

Multiple Inputs and Outputs for remote monitoring and control

STANDARD PACKAGE CONTAINS:

TRB245 // 9 W PSU // 1 x LTE antenna (swivel, SMA male) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // 16 pin terminal block // 1 x hex key // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Qualcomm, MIPS 24Kc, 650 MHz
Storage	16 MB Flash
Memory	64 MB RAM
Powering option	16pin terminal, 9-30 VDC
SIM	2 x Internal SIM holders (2FF)
Antenna connectors	1 x SMA for mobile, 1 x SMA for GPS
Ethernet	1 x 10/100 Ethernet port
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Inputs/Outputs	On 16pin socket: 3 x Digital input/Digital open collector output (configurable), 1 x Analog input
Serial	1 x RS232, 1 x RS485
Status LEDs	3 x Connection type, 3 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	83 x 25 x 74.2 mm
Weight	165 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing
Modbus	TCP slave, TCP master, RTU master, RTU gateway, Modbus over MQTT
Serial	Console, Over IP, Modem, NTRIP, Modbus
Administration	Multi user, Configuration profiles, Diagnostics, logs, Configuration backup



TRB255

INDUSTRIAL M2M GATEWAY

Industrial all-in-one M2M LTE Cat-M1/NB-IoT/EGPRS gateway, equipped with multiple inputs/outputs, RS232, RS485, and Ethernet interfaces to be used universally in various M2M applications.

CONNECTIVITY

4G LTE (Cat M1), NB-IoT, 2G

DUAL SIM

With auto failover, backup WAN and other switching scenarios

SERIAL PORTS

Equipped with RS232/RS485 serial communication interfaces

I/O

Multiple Inputs and Outputs for remote monitoring and control

STANDARD PACKAGE CONTAINS:

TRB255 // 9 W PSU // 1 x LTE antenna (swivel, SMA male) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // Ethernet cable (1.5 m) // 1 x hex key // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat M1), NB-IoT, 2G
CPU	Qualcomm, MIPS 24Kc, 650 MHz
Storage	16 MB Flash
Memory	64 MB RAM
Powering option	16pin terminal, 9-30 VDC
SIM	2 x Internal SIM holders (2FF)
Antenna connectors	1 x SMA for mobile, 1 x SMA for GPS
Ethernet	1 x 10/100 Ethernet port
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Inputs/Outputs	On 16pin socket: 3 x Digital input/Digital open collector output (configurable), 1 x Analog input
Serial	1 x RS232, 1 x RS485
Status LEDs	3 x Connection type, 3 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	83 x 25 x 74.2 mm
Weight	165 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing
Modbus	TCP slave, TCP master, RTU master, RTU gateway, Modbus over MQTT
Serial	Console, Over IP, Modem, NTRIP, Modbus
Administration	Multi user, Configuration profiles, Diagnostics, logs, Configuration backup

MANUFACTURING FACILITY REMOTE MANAGEMENT



// INDUSTRIAL & AUTOMATION

In 2020 there were more than 290 thousand manufacturing plants in the US alone. This number is bound to keep increasing as the world industry is ever-growing in size. Such industrial expansion can be hard to keep up with as hiring and training new personnel takes time. With the increase in the efficiency of their factories, companies resort to manufacturing and assembly line automation.

SOLUTION

Does the fact that one device from Teltonika Networks can connect a PLC, HMI, RFID, panic alert button and more intrigue you? That little device is the TRB255 industrial M2M gateway. First of all, this gateway can communicate with various devices responsible for working on the manufacturing line thanks to multiple interface ports.

For the primary connections — PLC can be connected via the RS232 serial communication interface, while HMI can take up the RS485. This setup takes care of the central production line machinery. The Ethernet connects the HVAC (Heating, Ventilation and Conditioning) system, which can be adjusted based on the temperature and humidity sensors' data, connecting to TRB255 through the analog input.


Teltonika industrial gateway can also accommodate all the other supporting systems thanks to its multiple differing connections. Such

design can incorporate older components of the assembly line into one system. For example, a panic alert button can connect to one of the digital input/output ports, and another port can accommodate an RFID reader to ensure additional factory security.

While the TRB225 industrial gateway provides a way to incorporate all devices into one network, Teltonika Networks RMS (Remote Management System) lets you access all of it remotely. This setup enables you to reach our products and third-party equipment as if you were there physically and perform troubleshooting, update firmware, and change any settings.

BENEFITS

- /Backward compatibility with the 2G network allows for installation in facilities using legacy equipment.
- /The supported power supply voltages range from 9 to 30V, allowing easy integration with industrial components.
- /Dual-SIM offers automatic failover in case the cellular network connection gets disrupted.
- /TRB255 offers multiple interfaces, including RS232 and RS485, letting you connect old and new equipment in the same network.
- /This router is compatible with the Teltonika RMS, which allows you to gather data and manage your Teltonika devices remotely.

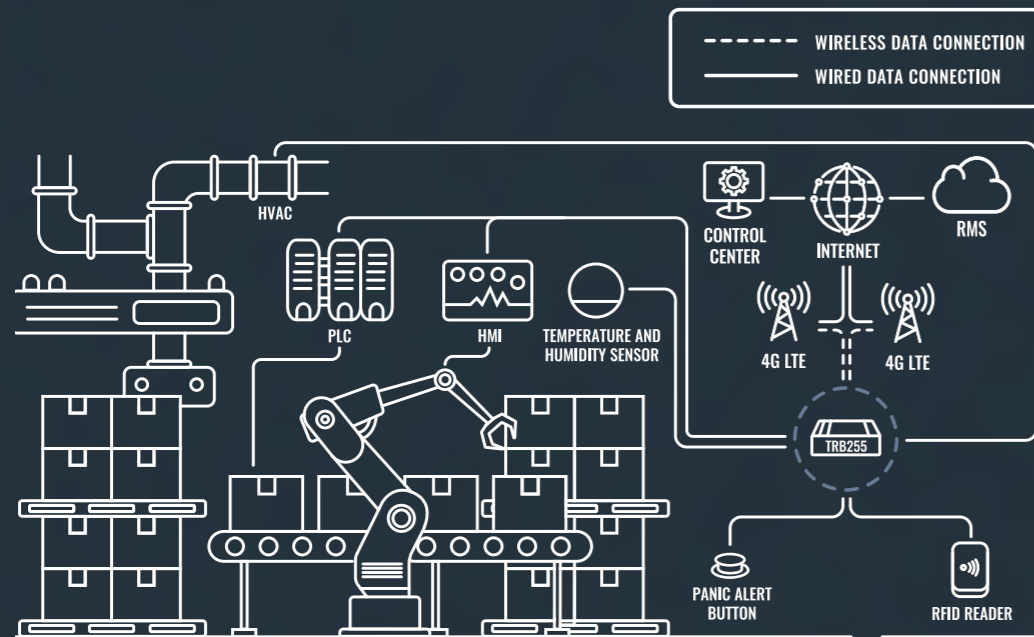

WIRELESS PARKING AVAILABILITY DATA TRANSMISSION



// SMART CITY

Due to the high volume of cars on the streets, up to 30% of traffic comprises daily commuters. They are wondering about trying to find a free parking spot. People looking for parking pollute the environment with car exhaust fumes. So, is there a way to address this issue and reduce adverse effects?

SOLUTION


Our partners created a system to display available parking spaces. This urban IoT solution already helps solve Belgrade traffic congestion, exhaust fume pollution, and noise issues.

Sensors in each parking spot are connected to a communication unit. They collect all the information about parking availability and send it to a cloud server. The display board is installed farther from the sensors, so they opted for a 4G cellular connection provided by Teltonika Networks industrial TRB145 LTE gateway installed within the display housing. TRB145 retrieves the information from

the server and passes on the parking space availability data to the display via the RS485 serial interface. The TRB145 gateway design is compact enough to fit inside the display board. Also, TRB145 runs on the open-source operating system — RutOS, allowing for seamless integration with other systems and customization according to the existing infrastructure.

BENEFITS

- /TRB145 has a sturdy aluminum housing that resists vibrations near heavy and constant traffic.
- /TRB145 has a compact design, perfect for the fast and easy deployment of urban IoT solutions and tight spaces.
- /Multiple software features like Firewall, Open VPN, and more, TRB145 for applications where security plays an important role.
- /TRB145 provides stable 4G LTE cellular connectivity where a wired connection isn't an option.

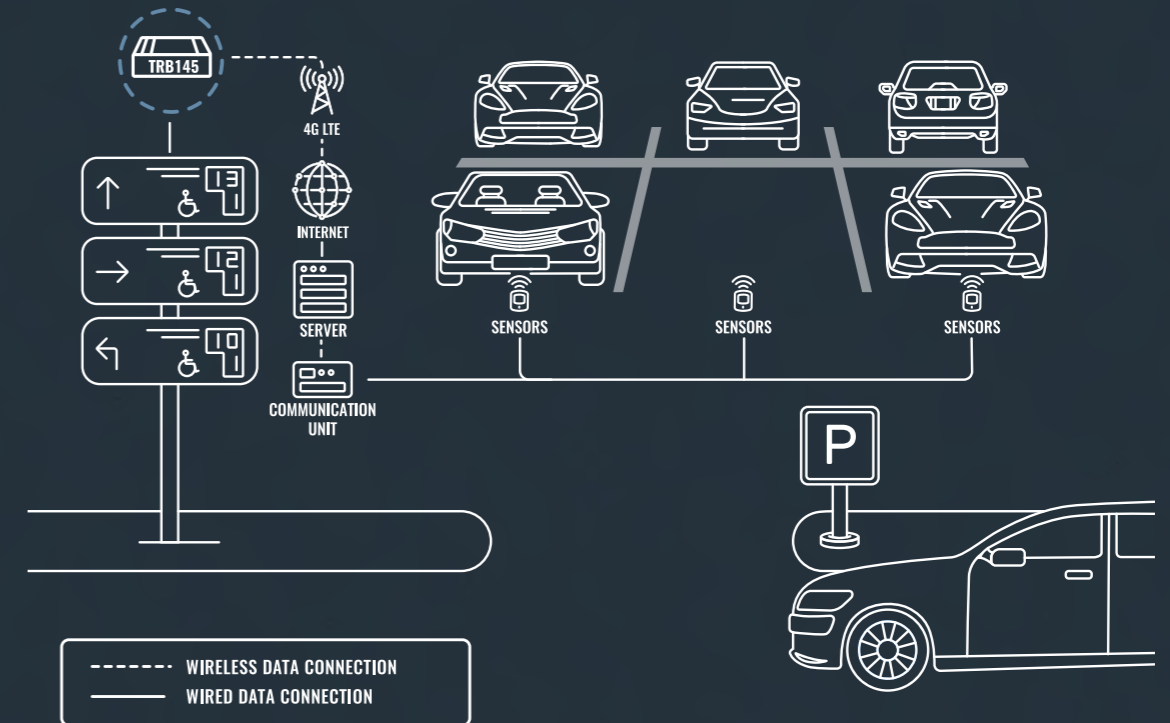

ROUTERS

Our routers are equipped with various wireless and wired connectivity options and advanced technologies, making them an essential tool to connect people, machines, and infrastructure across diverse market sectors. The Teltonika Networks RUT series is engineered to be easily deployed even in the most challenging IoT setups. Our RutOS, based on Linux OpenWRT, has become one of the most functional operating systems in the networking device market.

RUT200

INDUSTRIAL CELLULAR ROUTER

RUT200 is a compact-sized industrial cellular router compatible with the Middle East, Asia, Africa, South America, and CIS networks. Featuring multiple connectivity options (LTE, Wi-Fi, and Ethernet), this model is perfect for quickly setting up primary and backup connectivity with remote management capabilities.

CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

WI-FI

Wireless Access Point with Hotspot functionality

WAN FAILOVER

Automatic switching to available Backup connection

RMS

For remote management, access & VPN services

STANDARD PACKAGE CONTAINS:

RUT200 // 9 W PSU // 2 x LTE antennas (swivel, SMA male) // 1 x WiFi antenna (swivel, RP-SMA male) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Mediatek MIPS 24Kc 580 MHz
Storage	16 MB Flash
Memory	128 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	1 x External SIM holder (2FF)
Antenna connectors	2 x SMA for mobile, 1 x RP-SMA for WiFi
Ethernet	2 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 1 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Status LEDs	3 x Connection type, 5 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels
Dimensions (W x H x D)	83 x 25 x 74 mm
Weight	125 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

RUT240

INDUSTRIAL CELLULAR ROUTER

Compact, robust and powerful device tailored for industrial M2M/IoT applications. RUT240 features two Ethernet ports and a wireless interface with Hotspot functionality. Stable connectivity is ensured with WAN failover, while the RutOS software meets the highest security standards. Compatible with RMS.

CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

WI-FI

Wireless Access Point with Hotspot functionality

WAN FAILOVER

Automatic switching to available Backup connection

RMS

For remote management, access & VPN services

STANDARD PACKAGE CONTAINS:

RUT240 // 9 W PSU // 2 x LTE antennas (swivel, SMA male) // 1 x WiFi antenna (swivel, RP-SMA male) // Ethernet cable (1.5 m) // SIM Adapter kit // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Atheros, MIPS 24Kc, 400 MHz
Storage	16 MB Flash
Memory	64 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	1 x External SIM holder (2FF)
Antenna connectors	2 x SMA for mobile, 1 x RP-SMA for WiFi
Ethernet	2 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 1 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Status LEDs	3 x Connection type, 5 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels
Dimensions (W x H x D)	83 x 25 x 74 mm
Weight	125 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

RUT241

INDUSTRIAL CELLULAR ROUTER

Equipped with 4G LTE, Wi-Fi, and two Ethernet ports, RUT241 offers unstoppable connection continuity with automatic WAN failover. Industrial design, compact size, multiple connection interfaces, and compatibility with RMS make this device an excellent fit in numerous IoT and M2M solutions.

CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

WI-FI

Wireless Access Point with Hotspot functionality

WAN FAILOVER

Automatic switching to available Backup connection

RMS

For remote management, access & VPN services

STANDARD PACKAGE CONTAINS:

RUT241 // 9 W PSU // 2 x LTE antennas (swivel, SMA male) // 1 x WiFi antenna (swivel, RP-SMA male) // Ethernet cable (1.5 m) // SIM Adapter kit // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Mediatek MIPS 24Kc 580 MHz
Storage	16 MB Flash
Memory	128 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	1 x External SIM holder (2FF)
Antenna connectors	2 x SMA for mobile, 1 x RP-SMA for WiFi
Ethernet	2 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 1 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Status LEDs	3 x Connection type, 5 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels
Dimensions (W x H x D)	83 x 25 x 74 mm
Weight	125 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

RUT360

LTE CAT6 INDUSTRIAL CELLULAR ROUTER

A successor of our best-selling RUT240, RUT360 keeps its compact shape in a rugged aluminum housing but offers more processing power and increased cellular speeds up to 300Mbps with Carrier Aggregation. Unique programming, remote monitoring, and security features make RUT360 perfect for IoT and M2M applications, where secure connectivity is required, but mobile data speeds are limited.

4G LTE CAT 6

Cellular speeds up to 300Mbps with Carrier Aggregation

WI-FI

802.11 b/g/n Wireless Access Point with Hotspot functionality

WAN FAILOVER

Automatic switching to available Backup connection

RMS

For remote management, access & VPN services

STANDARD PACKAGE CONTAINS:

RUT360 // 12 W PSU // 2 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (swivel, RP-SMA male) // Ethernet cable (1.5 m) // SIM Adapter kit // RMS Flyer // QSG (Quick Start Guide) // Packaging box



HARDWARE



Mobile	4G/LTE (Cat 6), 3G
CPU	Qualcomm, MIPS 24Kc, 650 MHz
Memory	16 MBytes Flash, 128 MBytes RAM
Powering option	4pin power socket, 9-30 VDC
SIM	1 x External SIM holder (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi
Ethernet	2 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 1 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 2 x Digital input/Digital open collector output (configurable)
Status LEDs	2 x Connection type, 3 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	100 x 30 x 85 mm
Weight	247 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

RUT950

INDUSTRIAL CELLULAR ROUTER

RUT950 is a high-performance cellular router featuring dual-SIM, four Ethernet interfaces, and Wi-Fi. The device is designed as a primary or backup internet source to guarantee a reliable connection with high data throughput and data redundancy. RUT950 comes with RutOS software security features and RMS support.

CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

DUAL SIM

With auto failover, backup WAN and other switching scenarios

WI-FI

Wireless Access Point with Hotspot functionality

WAN FAILOVER

Automatic switching to available Backup connection

STANDARD PACKAGE CONTAINS:

RUT950 // 9 W PSU // 2 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (swivel, RP-SMA male) // Ethernet cable (1.5 m) // SIM Adapter kit // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Atheros, MIPS 74Kc, 550 MHz
Storage	16 MB Flash
Memory	128 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi
Ethernet	4 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Status LEDs	1 x Bi-Color connection type, 5 x Signal strength, 4 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels with flat mounting option
Dimensions (W x H x D)	110 x 50 x 100 mm
Weight	280 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
Supported Hotspot platforms	IronWiFi, HotspotSystem, Cloud4Wi, SAI + WiFi, MugiCloud, Purple.ai
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

RUT951

INDUSTRIAL CELLULAR ROUTER

RUT951 features dual-SIM cellular connectivity combined with Wi-Fi and four Ethernet interfaces to meet the needs of the most varied IoT scenarios. Powered by RutOS, this router offers advanced customization options, automation features, and top-level security for your solution.

CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

DUAL SIM

With auto failover, backup WAN and other switching scenarios

WI-FI

Wireless Access Point with Hotspot functionality

WAN FAILOVER

Automatic switching to available Backup connection

STANDARD PACKAGE CONTAINS:

RUT951 // 9 W PSU // 2 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (swivel, RP-SMA male) // Ethernet cable (1.5 m) // SIM Adapter kit // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Mediatek MIPS 24Kc 580 MHz
Storage	16 MB Flash
Memory	128 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi
Ethernet	4 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Status LEDs	1 x Bi-Color connection type, 5 x Signal strength, 4 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels with flat mounting option
Dimensions (W x H x D)	110 x 50 x 100 mm
Weight	287 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
Supported Hotspot platforms	IronWiFi, HotspotSystem, Cloud4Wi, SAI + WiFi, MugiCloud, Purple.ai
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

RUT955

INDUSTRIAL CELLULAR ROUTER

RUT955 offers a dual-SIM cellular connection, four Ethernet ports, and Wi-Fi combined with RS232, RS485, USB interfaces, and inputs/outputs for an incredible variety of professional application scenarios. This router comes with RutOS advanced software features such as Modbus, SNMP, TR-069, NTRIP, MQTT protocol support, and GNSS tracking capabilities.

CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

DUAL SIM

With auto failover, backup WAN and other switching scenarios

MULTIPLE INTERFACES

Ethernet, Serial (RS232, RS485) and multiple Inputs/Outputs for any industrial connectivity use case

GNSS

Global Navigation Satellite System for location services and time synchronization

STANDARD PACKAGE CONTAINS:

RUT955 // 9 W PSU // 2 x LTE antennas (magnetic mount, SMA male, 3 m cable) // 2 x WiFi antennas (magnetic mount, RP-SMA male, 1.5 m cable) // GNSS antenna (adhesive, SMA male, 3 m cable) // RS485 connector block // I/O connector block // Ethernet cable (1.5 m) // SIM Adapter kit // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Atheros, MIPS 74Kc, 550 MHz
Storage	16 MB Flash
Memory	128 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x SMA for GPS
Ethernet	4 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output On 10pin socket: 1 x Isolated digital input, 1 x Digital dry input, 1 x Analog input, 1 x Isolated open collector output (requires external voltage), 1 x Relay output (non-latching)
Serial	1 x RS232, 1 x RS485
Other	1 x USB host, 1 x MicroSD
Status LEDs	1 x Bi-Color connection type, 5 x Signal strength, 4 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels with flat mounting option
Dimensions (W x H x D)	110 x 50 x 100 mm
Weight	287 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing
Modbus	TCP slave, TCP master, RTU master, RTU gateway, Modbus over MQTT
Serial	Console, Over IP, Modem, NTRIP, Modbus

RUT956

INDUSTRIAL CELLULAR ROUTER

RUT956 is an industrial router that combines cellular, Wi-Fi, and wired connectivity options with automatic WAN failover and GNSS capabilities. Serial communication interfaces enable integrating more varied devices into the solution ecosystem, while I/O and advanced RutOS software facilitate equipment control, automation, and event notifications.

CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

DUAL SIM

With auto failover, backup WAN and other switching scenarios

MULTIPLE INTERFACES

Ethernet, Serial (RS232, RS485) and multiple Inputs/Outputs for any industrial connectivity use case

GNSS

Global Navigation Satellite System for location services and time synchronization

STANDARD PACKAGE CONTAINS:

RUT956 // 9 W PSU // 2 x LTE antennas (magnetic mount, SMA male, 3 m cable) // 2 x WiFi antennas (magnetic mount, RP-SMA male, 1.5 m cable) // GNSS antenna (adhesive, SMA male, 3 m cable) // RS485 connector block // I/O connector block // Ethernet cable (1.5 m) // SIM Adapter kit // QSG (Quick Start Guide) // Packaging box


HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Mediatek MIPS 24Kc 580 MHz
Storage	16 MB Flash
Memory	128 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x SMA for GPS
Ethernet	4 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output On 10pin socket: 1 x Isolated digital input, 1 x Digital dry input, 1 x Analog input, 1 x Isolated open collector output (requires external voltage), 1 x Relay output (non-latching)
Serial	1 x RS232, 1 x RS485
Other	1 x USB host
Status LEDs	1 x Bi-Color connection type, 5 x Signal strength, 4 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels with flat mounting option
Dimensions (W x H x D)	110 x 50 x 100 mm
Weight	287 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing
Modbus	TCP slave, TCP master, RTU master, RTU gateway, Modbus over MQTT
Serial	Console, Over IP, Modem, NTRIP, Modbus

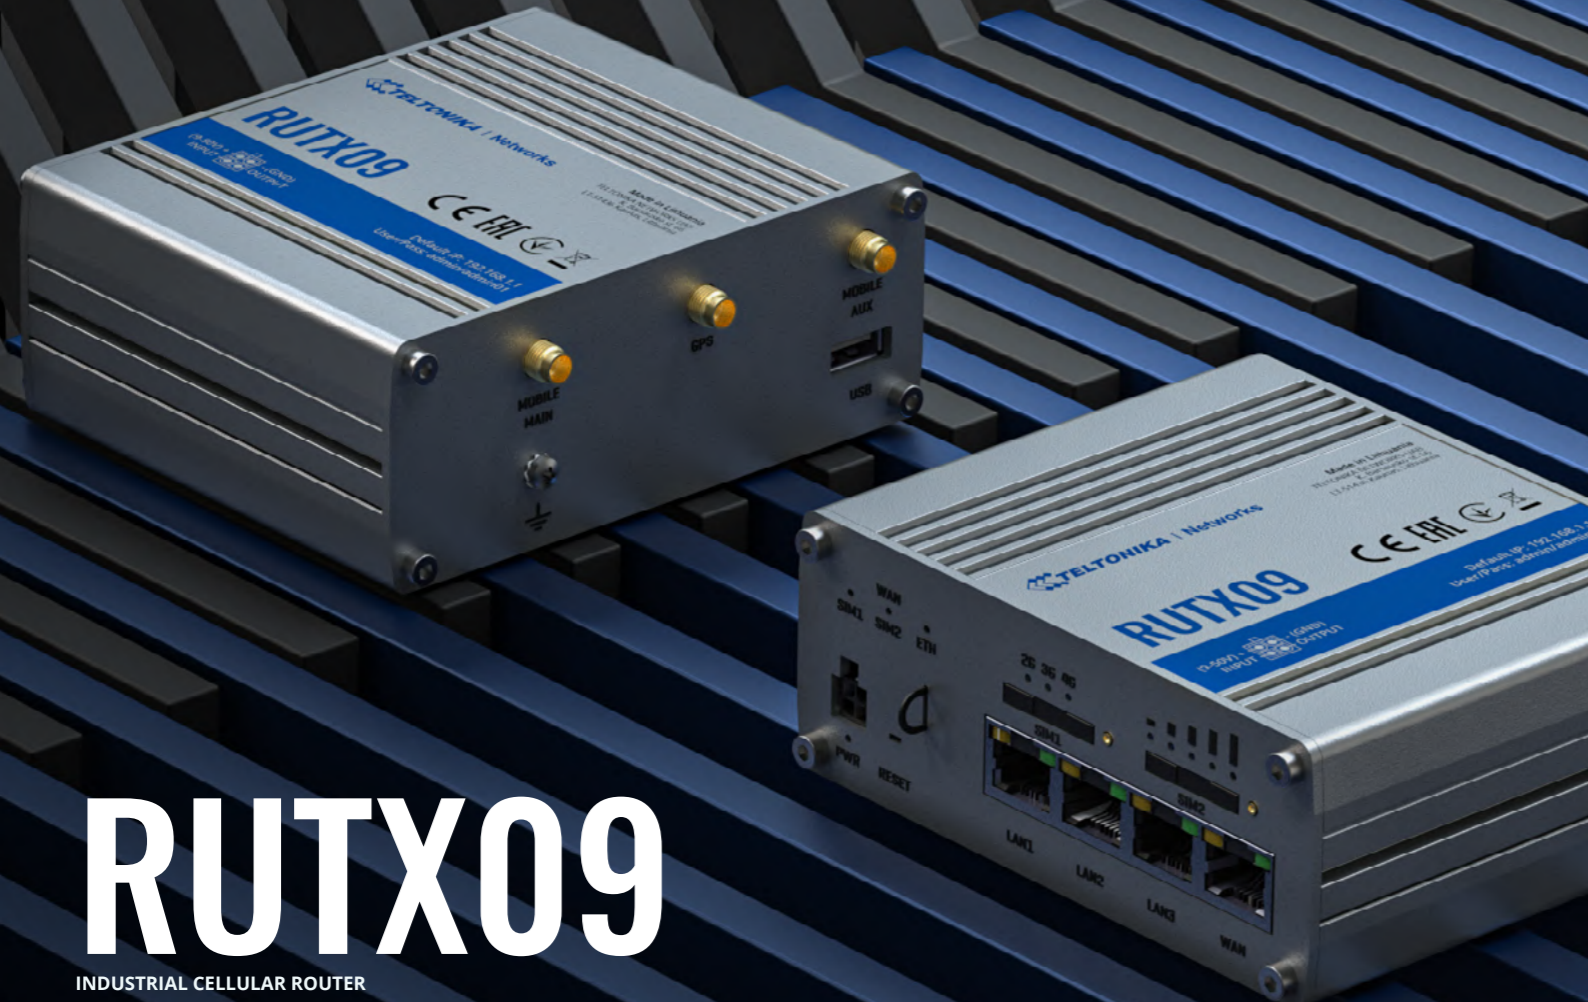

RUTX09

INDUSTRIAL CELLULAR ROUTER

RUTX09 is an LTE-A Cat 6 cellular IoT router with dual-SIM, Carrier Aggregation, and four Gigabit Ethernet interfaces. Designed as a primary or backup internet source, it can offer up to 300 Mbps cellular speeds, with high data throughput.

4G LTE CAT 6
Cellular speeds up to 300Mbps with Carrier Aggregation

DUAL SIM
With auto failover, backup WAN and other switching scenarios

GIGABIT ETH
4 x Gigabit Ethernet ports with up to 128 port/tag-based VLANs supported

GNSS
Global Navigation Satellite System for location services and time synchronization

STANDARD PACKAGE CONTAINS:

RUTX09 // 18 W PSU // 2 x LTE antennas (swivel, SMA male) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // SIM Adapter kit // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box


HARDWARE



Mobile	4G/LTE (Cat 6), 3G
CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4pin power socket, 9-50 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 1 x SMA for GPS
Ethernet	4 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host
Status LEDs	3 x WAN type, 2 x Connection type, 5 x Signal strength, 8 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions (W x H x D)	115 x 44.2 x 95.1 mm
Weight	455 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, WireGuard, ZeroTier
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Network shares (Samba), Traffic Logging
Administration	Multi user, Configuration profiles, Diagnostics, logs, Configuration backup

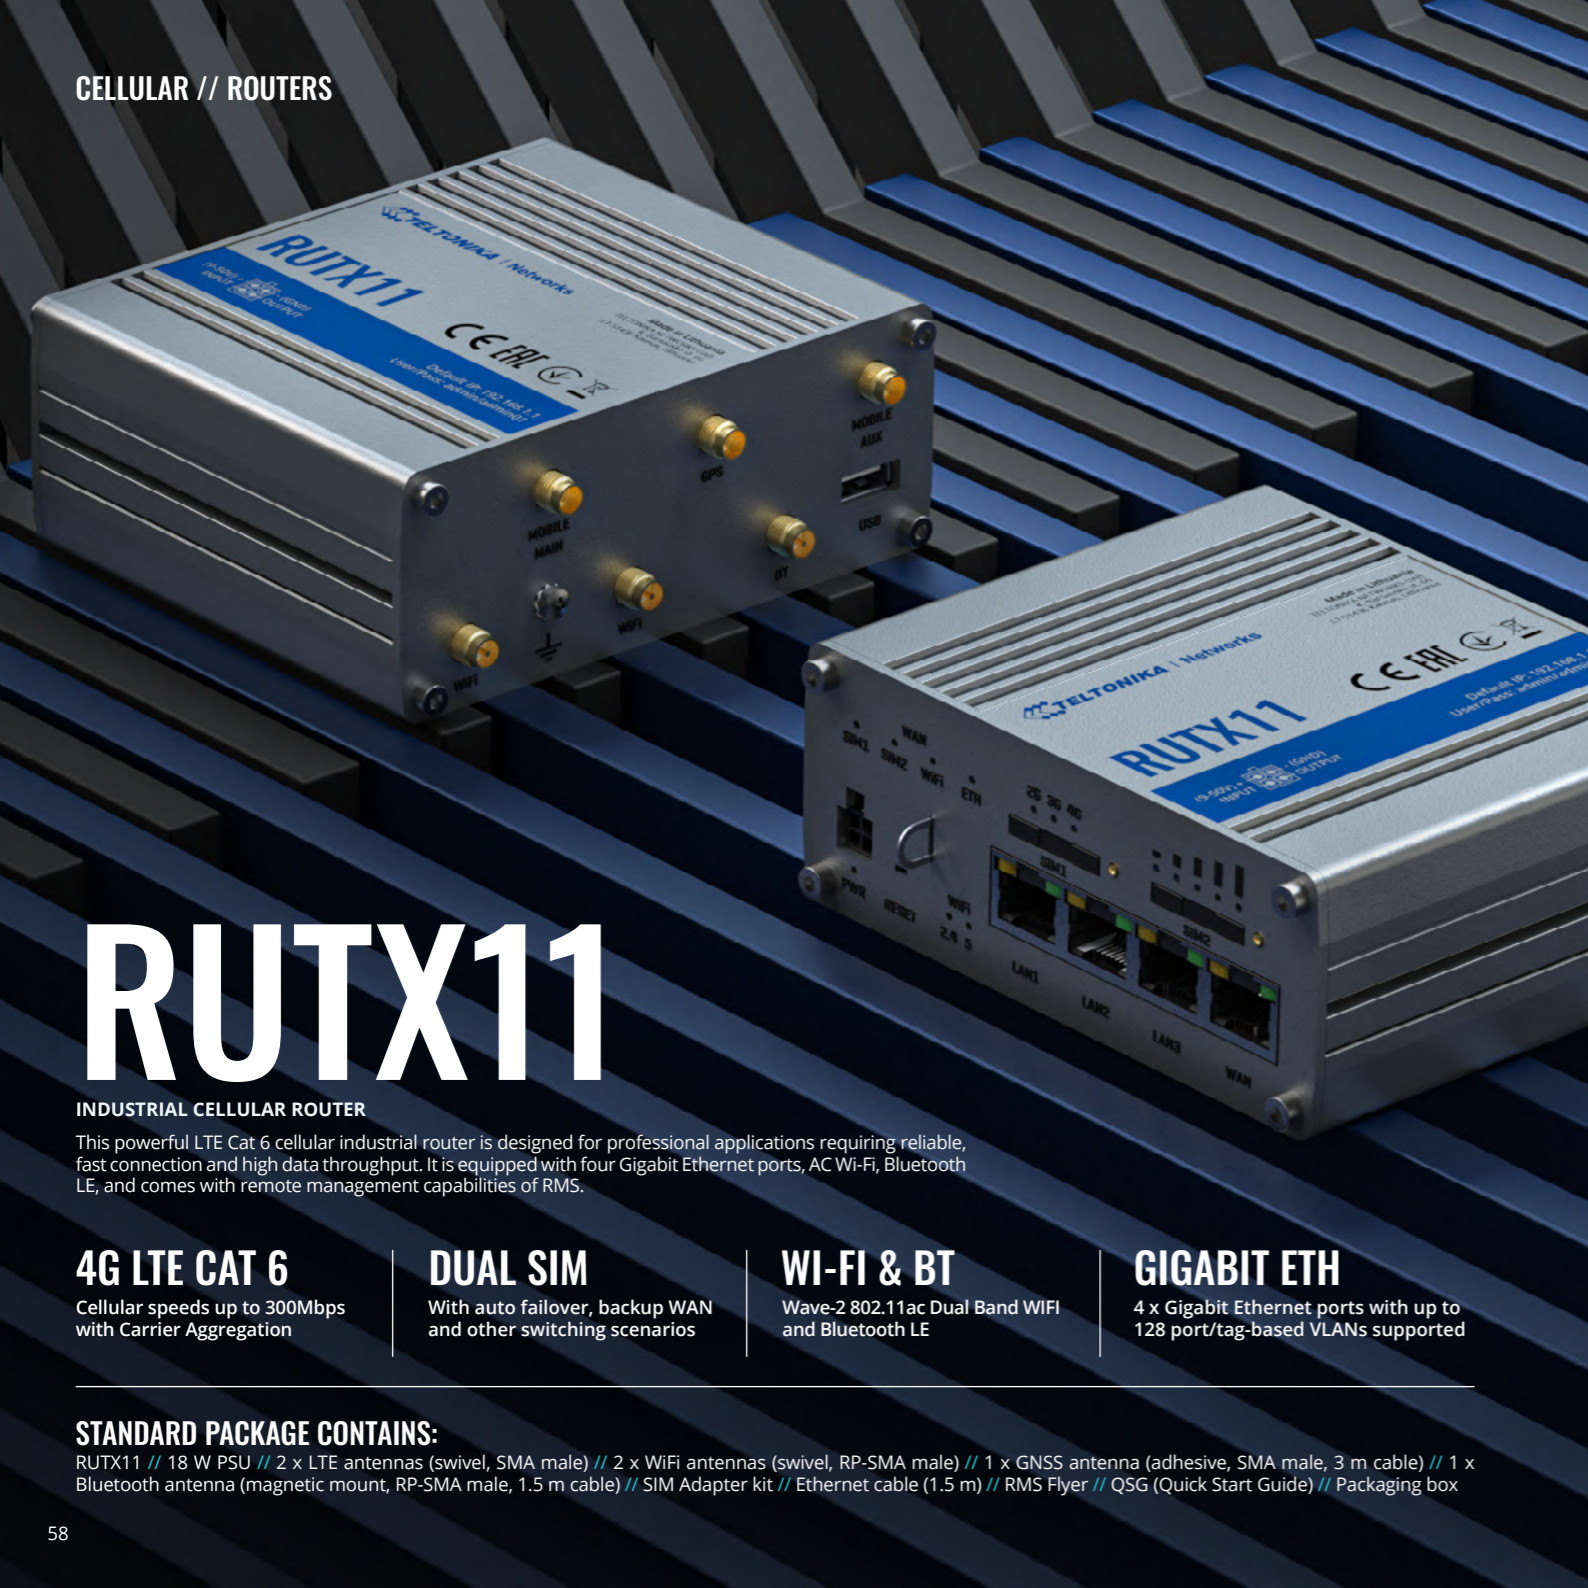

RUTX11

INDUSTRIAL CELLULAR ROUTER

This powerful LTE Cat 6 cellular industrial router is designed for professional applications requiring reliable, fast connection and high data throughput. It is equipped with four Gigabit Ethernet ports, AC Wi-Fi, Bluetooth LE, and comes with remote management capabilities of RMS.

4G LTE CAT 6

Cellular speeds up to 300Mbps with Carrier Aggregation

DUAL SIM

With auto failover, backup WAN and other switching scenarios

WI-FI & BT

Wave-2 802.11ac Dual Band WiFi and Bluetooth LE

GIGABIT ETH

4 x Gigabit Ethernet ports with up to 128 port/tag-based VLANs supported

STANDARD PACKAGE CONTAINS:

RUTX11 // 18 W PSU // 2 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (swivel, RP-SMA male) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // 1 x Bluetooth antenna (magnetic mount, RP-SMA male, 1.5 m cable) // SIM Adapter kit // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE

Mobile	4G/LTE (Cat 6), 3G
CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4pin power socket, 9-50 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x RP-SMA for Bluetooth, 1 x SMA for GPS
Ethernet	4 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
WiFi	IEEE 802.11b/g/n 2.4GHz, IEEE 802.11ac/n/a 5GHz, Access point (AP), Station (STA)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Bluetooth	4.0 (Low energy)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host
Status LEDs	4 x WAN type, 2 x Connection type, 5 x Signal strength, 2 x WiFi, 8 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions	115 x 44.2 x 95.1 mm
Weight	456 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, WireGuard, ZeroTier
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing



RUTX12

DUAL LTE CAT 6 INDUSTRIAL CELLULAR ROUTER

This powerful dual LTE Cat 6 router is a great fit for mission-critical applications. Two cellular modems for dual simultaneous connections, seamless mobile service switching and load balancing features make this device irreplaceable in applications where losing connection is not an option.

DUAL LTE

Cellular speeds up to 600Mbps with dual simultaneous LTE CAT 6 connections

DUAL SIM

Instant failover switching

WI-FI & BT

Wave-2 802.11ac Dual Band WiFi and Bluetooth LE

LOAD BALANCING

Allows to use multiple WAN sources to increase throughput

STANDARD PACKAGE CONTAINS:

RUTX12 // 24 W PSU // 4 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (magnetic mount, RP-SMA male, 1.5 m cable) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // 1 x Bluetooth antenna (magnetic mount, RP-SMA male, 1.5 m cable) // SIM Adapter kit // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	2 X 4G/LTE (Cat 6), 3G
CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4pin power socket, 9-50 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	4 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x RP-SMA for Bluetooth, 1 x SMA for GPS
Ethernet	5 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 4 x LAN
WiFi	IEEE 802.11b/g/n 2.4GHz, IEEE 802.11ac/n/a 5GHz, Access point (AP), Station (STA)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Bluetooth	4.0 (Low energy)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host
Status LEDs	4 x WAN type, 6 x Connection type, 6 x Signal strength, 2 x WiFi, 10 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions (W x H x D)	132 x 44.2 x 95.1 mm
Weight	540 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
Supported Hotspot platforms	IronWiFi, HotspotSystem, Cloud4Wi, SAI + WiFi, MugiCloud, Purple.ai



RUTX14

4G LTE CAT 12 INDUSTRIAL CELLULAR ROUTER

RUTX14 is the fastest single modem LTE-A Cat 12 router in the Teltonika Networks product range. With two SIM cards, Wave-2 dual-band Wi-Fi, five Gigabit Ethernet ports, and automatic failover, you may expect high compatibility, unbeatable network resilience, and exceptional speed.

4G LTE CAT12

Incredible download & upload speeds with carrier aggregation (up to 600 Mbps / 150 Mbps respectively)

DUAL SIM

With auto failover, backup WAN and other switching scenarios

WI-FI & BT

Wave-2 802.11ac Dual Band WiFi and Bluetooth LE

GIGABIT ETH

5 x Gigabit Ethernet ports with up to 128 port/tag-based VLANs supported

STANDARD PACKAGE CONTAINS:

RUTX14 // 24 W PSU // 4 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (magnetic mount, RP-SMA male, 1.5 m cable) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // 1 x Bluetooth antenna (magnetic mount, RP-SMA male, 1.5 m cable) // SIM Adapter kit // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE

Mobile	4G/LTE (Cat 12)
CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4 pin power socket, 9-50 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	4 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x RP-SMA for Bluetooth, 1 x SMA for GPS
Ethernet	5 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 4 x LAN
WiFi	IEEE 802.11b/g/n 2.4GHz, IEEE 802.11n/ac 5GHz, Access point (AP), Station (STA)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Connectors	1 x 4 pin DC, 5 x Ethernet, 4 x SMA for LTE, 2 x WiFi RP-SMA, 1 x SMA for GNSS, 1 x RP-SMA for Bluetooth
Bluetooth	4.0 (Low energy)
Inputs/Outputs	On 4 pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host, 1 x Grounding screw
Status LEDs	4 x WAN type, 2 x Connection type, 3 x Signal strength, 2 x WiFi, 10 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions (W x H x D)	132 x 44.2 x 95.1 mm
Weight	515 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
Supported Hotspot platforms	IronWiFi, HotspotSystem, Cloud4Wi, SAI + WiFi, MugiCloud, Purple.ai

RUTXR1

ENTERPRISE SFP/LTE RACK MOUNT READY ROUTER

The first rack-mountable LTE Cat 6 router in the Teltonika Networks portfolio comes with redundant power supplies, WAN failover, dual-SIM, SFP, USB, and dedicated console ports. This feature-rich device with highly customizable and powerful RutOS is perfect where a fast and ultra-reliable connection is needed.

4G LTE CAT 6

Cellular speeds up to 300Mbps with Carrier Aggregation

SFP

SFP port for long-range Fiber-optic communication

WI-FI

Wave-2 802.11ac Dual Band WiFi

DUAL POWER

Dual Power supply compatibility ensures uninterrupted service

STANDARD PACKAGE CONTAINS:

RUTXR1 // 18 W PSU // 2 x LTE antennas (magnetic mount, SMA male, 3 m cable) // 2 x WiFi antennas (magnetic mount, RP-SMA male, 1.5 m cable) // 1 Rack - mounting kit // 4 x Standing pads // 8 x Screws // SIM Adapter kit // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box



HARDWARE



Mobile	4G/LTE (Cat 6), 3G
CPU	QualcomStorageARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4pin power socket, 9-50 VDC (main) 4pin power socket, 9-50 VDC (redundant)
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi
Ethernet	5 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 4 x LAN
WiFi	IEEE 802.11a/b/g/n/ac 2.4GHz/5GHz, Access point (AP), Station (STA)
Other	1 x USB host, 1 x SFP, 1 x RS232 console
Status LEDs	2 x WAN type, 2 x Connection type, 3 x Signal strength, 2 x SIM, 2 x Console, 10 x Ethernet, 2 x Power
Operating temperature	-40 °C to 75 °C
Housing	Full aluminium rack unit housing with grounding capability
Dimensions (W x H x D)	272 x 42.6 x 122.6 mm
Weight	1050 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, WireGuard, ZeroTier
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Network shares (Samba), Traffic Logging

TCR100

4G Wi-Fi ROUTER FOR HOME USER

Extensive industrial IoT experience brought to our home users. This LTE-A Cat 6 router also offers dual-band Wi-Fi and two Ethernet ports to connect devices. Featuring Wi-Fi and Wi-Fi Protected buttons for quick setup, this router is simple to use yet enables high customizability for advanced users with RutOS.

4G LTE-ADVANCED

LTE CAT6 enables cellular speeds up to 300Mbps with carrier aggregation

WI-FI

Dual-Band with 2.4 GHz & 5.0 GHz frequencies

SECURE

Firewall and numerous VPN services including OpenVPN, IPsec, PPTP, L2TP & DMVPN

RUTOS

Powerful OS with intuitive UI based on OpenWrt empowers endless configuration possibilities.

STANDARD PACKAGE CONTAINS:

TCR100 // 18 W PSU // 2 x LTE antennas (swivel, SMA male) // SIM Adapter kit // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

HARDWARE



Mobile	4G/LTE (Cat 6), 3G
CPU	Qualcomm, MIPS 24Kc, 650 MHz
Memory	16 MBytes Flash, 128 MBytes RAM
Powering option	4pin power socket, 9-30 VDC
SIM	1 x External SIM holder (2FF)
Antenna connectors	2 x SMA for mobile
Ethernet	2 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 1 x LAN
WiFi	2.4 GHz (802.11 b/g/n, 2x2 MIMO), 5 GHz (802.11 ac, 1x1 MIMO), Access Point (AP), Station (STA)
Status LEDs	1 x Internet, 1 x WiFi, 3 x Mobile connection strength, 2 x Ethernet status
Operating temperature	-40 °C to 75 °C
Housing	Plastic housing with aluminum screws and heatsink
Dimensions (W x H x D)	150 x 37 x 105 mm
Weight	376 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

SAFE AND SIMPLE TO SET UP HOME NETWORK WITH TCR100



// SMART CITY

Our households continue transforming into living and breathing technological ecosystems as more smart devices enter our lives. You may have an automated conditioning system that only turns on at certain times to save energy or turn on your robot vacuum cleaner while at work. That is no longer science fiction but a current-day reality.

SOLUTION


With the first-ever consumer router from Teltonika Networks, you get a user-friendly solution for setting up your home connectivity. Even in remote areas, you can enjoy stable internet, as TCR100 offers 4G cellular connectivity without compromising your speed. It is a perfect choice, even when a wired connection is impossible.

In this use case, two Ethernet ports accommodate a smart TV and an NVR that stores video feed from connected IP cameras. The rest of the devices like a smart fridge, laptop, AC, and alarm systems connect to the network wirelessly. The data from connected equipment can be helpful to optimize your IoT setup. Unlike standard home routers, the TCR100 can support over 50 devices simultaneously, thanks to the applied know-how from the industrial sector.

TCR100 is easy to set up. It features Wi-Fi and Wi-Fi Protected buttons for wireless network access within a click. Besides, a user-friendly WebUI provides rich customization options, a pre-configured firewall, and guest Wi-Fi to ensure the security of your home network. On top of that, periodical firmware updates eliminate vulnerabilities and bring new functionality.

BENEFITS

- /4G Cat6 technology and Dual-band Wi-Fi offer excellent wireless performance for all connected devices, even in remote locations.
- /RutOS is friendly for newcomers yet full of customization possibilities for advanced users.
- /TCR100 is simple to set up, even for beginners.
- /This model has Wi-Fi and Wi-Fi Protected buttons for easy wireless network access.
- /TCR100 receives periodical firmware downloads, bringing enhanced security and new features to your home router.

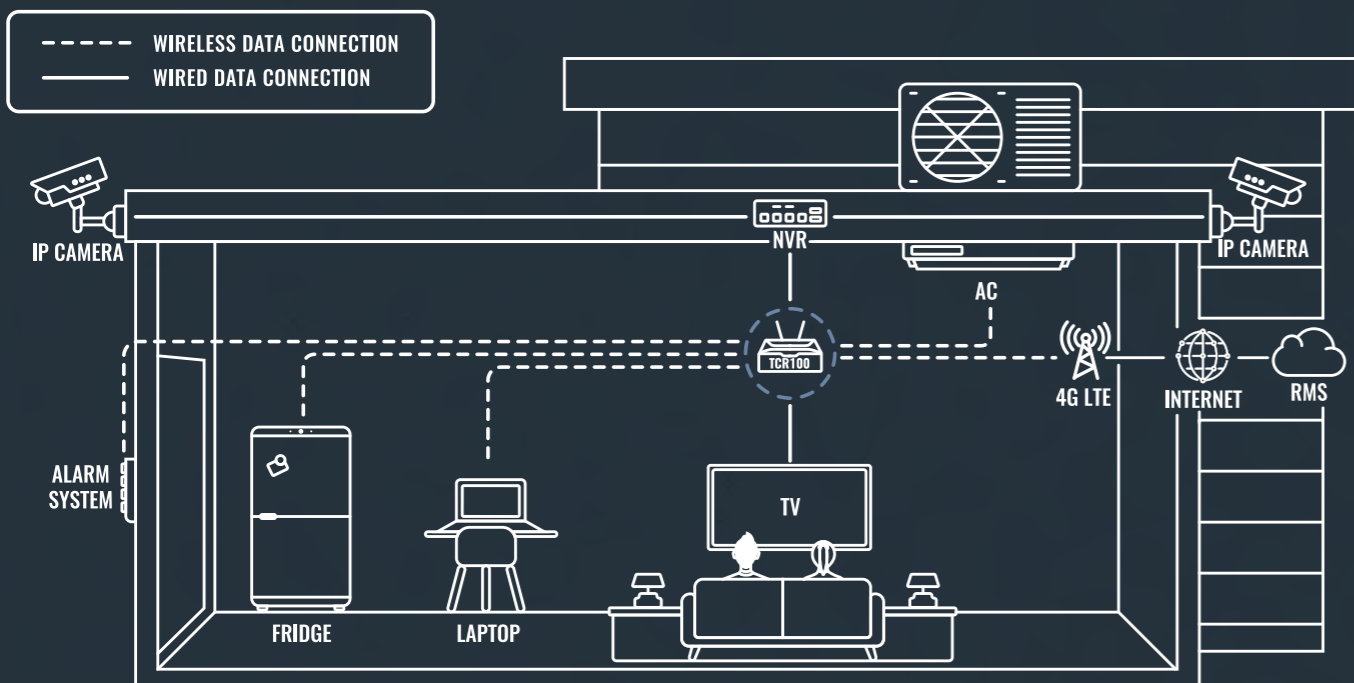

WIRELESS BROADBAND CONNECTIVITY FOR GAS STATIONS



// RETAIL

Despite growing awareness regarding global warming and the greenhouse effect, gasoline and diesel remain the most common fuels today. Besides, the times when gas stations had only one purpose of supplying gasoline been long gone. Nowadays, they are multifunctional zones that often include convenience stores, cafes, resting areas, restrooms, and more. The number of gas stations is still growing in a lot of places around the world: some are in the cities and some - in remote areas. This variety comes with a set of connectivity challenges.

SOLUTION

RUTX14 router is the central piece of this solution. This first-ever LTE Cat 12 cellular router in our portfolio enables quick and easy deployment in any situation, even in remote areas. Opting for wireless cellular connectivity reduces the complexity of the solution, so it takes significantly less time and installation resources. Cat 12 router can reach speeds up to 600 Mbps, which is enough to serve the varied needs of devices used in similar environments.


Surveillance cameras inside and outside the petrol station, Points of Sale (POS), digital signage screens require speedy connection, network stability, and broad data bandwidth. These devices connect

to the router via Ethernet cables through five available Gigabit ports available on RUTX14. Product scanners, tablets, and other wireless devices used for work purposes connect to a private WIFI network for security reasons. There is a separate public Guest WIFI created for the visitors. A wide selection of VPN services ensures that the most varied security requirements and preferences are met.

For an even more simplified solution, our TSW100 switch can power up the cameras via PoE. Compatibility with RMS and various other IoT platforms enables remote accessibility for IT support teams and various integrators to prevent any downtime and solve issues immediately and cost-efficiently.

BENEFITS

- /Speedy connection with download speeds up to 600 Mbps and upload speeds up to 150 Mbps.
- /Quick and straightforward setup for an all-in-one solution to connect an ecosystem of multiple devices.
- /Multiple WANs and various VPNs to secure your network.
- /Remote management and monitoring via RMS or a variety of third-party IoT platforms.

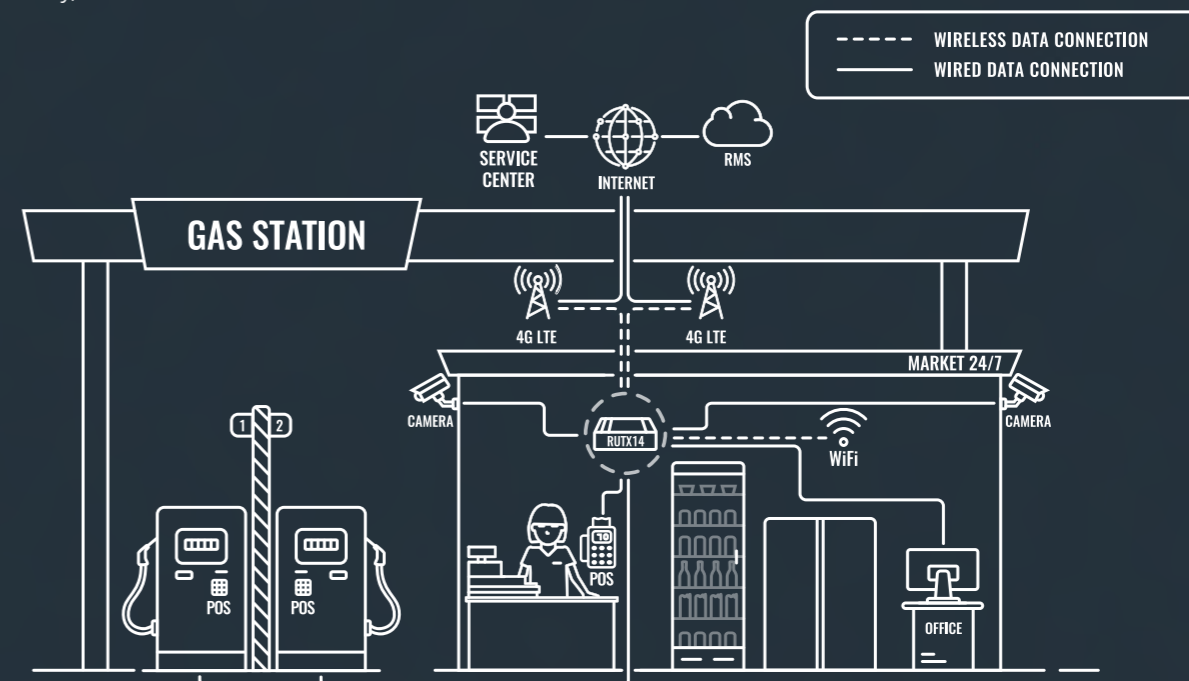

ACCESSORIES / POWERING OPTIONS



EU power supply, 9 W
Order code: PR3PUEU3



UK power supply, 9 W
Order code: PR3PUUK3



AU power supply, 9 W
Order code: PR3PUAU3



US power supply, 9 W
Order code: PR3PUUS3



EU 2-pin power supply, 9 W
Order code: PR3PREU6



UK 2-pin power supply, 9 W
Order code: PR3PRUK6



AU 2-pin power supply, 9 W
Order code: PR3PRAU6



US 2-pin power supply, 9 W
Order code: PR3PRUS6



EU power supply, 18 W
Order code: PR3PXEU3



UK power supply, 18 W
Order code: PR3PXUK3



AU power supply, 18 W
Order code: PR3PXAU3



US power supply, 18 W
Order code: PR3PXUS3



EU power supply, 24 W
Order code: PR3P2EU3



UK power supply, 24 W
Order code: PR3P2UK3



AU power supply, 24 W
Order code: PR3P2AU3



US power supply, 24 W
Order code: PR3P2US3

ACCESSORIES / POWERING OPTIONS



EU Power supply, 50 V, 1.3 A
Order code: PR3PWEU3



UK Power supply, 50 V, 1.3 A
Order code: PR3PWUK3



US Power supply, 50 V, 1.3 A
Order code: PR3PWUS3



Universal power supply, 9 W
Order code: PR3PUPS3



4-pin to barrel socket adapter
Order code: PR2PD01B



4-pin power adapter with I/O access
Order code: PR5MEC21



Automotive power supply
Order code: PR2AM20M



Power cable whit 4-way screw terminal
Order code: PR2FK20M



Power cable whit 4-way open wire
Order code: PR2PL15B



4-pin plug with contact terminals
Order code: PR4MK04K



DIN Rail power supply
Order code: PR3PDNP0

ACCESSORIES / ANTENNA OPTIONS



**COMBO MIMO mobile/GNSS/
WiFi ROOF SMA antenna**
Order code: PR1KCO28



**COMBO QUAD mobile/GNSS
ROOF SMA antenna**
Order code: PR1KCL28



**COMBO SISO mobile/GNSS/
WiFi ROOF SMA antenna**
Order code: PR1KCS28



**COMBO MIMO mobile
ROOF SMA antenna**
Order code: PR1KCL25



**Mobile magnetic SMA
antenna**
Order code: PR1KS210



Mobile SMA antenna
Order code: PR1US440



WiFi magnetic SMA antenna
Order code: PR1KRF30



WiFi SMA antenna
Order code: PR1URF51



**Bluetooth magnetic SMA
antenna**
Order code: PR1KRT25



**GNSS Adhesive SMA
antenna**
Order code: PR1KSG30



**Mobile adhesive sma
antenna**
Order code: PR1AS420



**WiFi dual-band SMA
antenna**
Order code: PR14RD35



**WiFi dual-band magnetic
antenna**
Order code: PR1KRD30



**Angled Compact Mobile
antenna**
Order code: PR1US450



**Straight Compact Mobile
antenna**
Order code: PR1CS450

ACCESSORIES / MOUNTING OPTIONS



Compact DIN Rail Kit
Order code: PRMEC11



DIN Rail Kit
Order code: PR5MEC00



Surface mounting Kit
Order code: PR5MEC12



Surface clip holder Kit
Order code: PR5MEC22

OUR WORLDWIDE PRESENCE



CONTACT US



info@teltonika.lt



Crowd-support forum
<https://community.teltonika.lt/>



Wiki knowledge base
<https://wiki.teltonika.lt/>



Teltonika-networks
<https://teltonika-networks.com/>